

BROCADE 6520 SWITCH

DATA CENTER

Scalable Enterprise-Class SAN Switch for Highly Virtualized, Cloud Environments

HIGHLIGHTS


- Provides high scalability in an ultra-dense 96-port switch to support highly virtualized, private cloud storage and data center consolidation
- Enables “pay-as-you-grow” flexibility from 48 to 96 ports using Ports on Demand (PoD) capabilities with speeds up to 16 Gbps
- Simplifies management through Brocade Fabric Vision technology, reducing operational costs and optimizing application performance
- Simplifies deployment and supports high-performance fabrics by using Brocade ClearLink Diagnostic Ports (D_Ports) to identify optic and cable issues
- Provides up to eight in-flight encryption and compression ports, delivering data center-to-data center security and bandwidth savings
- Optimizes link and bandwidth utilization with Brocade ISL Trunking and Dynamic Path Selection (DPS)
- Accelerates deployment and troubleshooting with Dynamic Fabric Provisioning (DFP), monitoring, and advanced diagnostics

Gen 5 Fibre Channel is the purpose-built, data center-proven network infrastructure for storage, delivering unmatched reliability, simplicity, and 16 Gbps performance. The Brocade 6520 with Gen 5 Fibre Channel unleashes the full potential of high-density server virtualization, cloud architectures, and next-generation storage.

To meet dynamic and growing business demands, data centers are evolving into highly virtualized environments and cloud-based architectures. This approach enables organizations to consolidate and simplify their IT resources, resulting in increased business agility and lower capital and operating expenses. However, enterprise data centers must keep pace with the changes driven by increasingly virtualized workloads and storage resources. Selecting the right network is therefore key to realizing the full benefits of these cloud-based architectures. By treating the network as a strategic part of a highly virtualized environment, organizations can increase optimization and efficiency even as they rapidly scale their environments.

Today, Brocade® Fibre Channel switches are the de facto storage networking standard for mission-critical workloads and highly virtualized environments. Based on years of successful deployment in enterprise data centers around the globe, Brocade Fibre Channel SANs provide highly resilient, scalable, and simplified network infrastructure for storage.

The Brocade 6520 Switch meets the demands of growing, dynamic workloads and private cloud storage environments by delivering market-leading Gen 5 Fibre Channel technology and capabilities. The Brocade 6520 is a high-density, purpose-built, foundational building block for large and growing Storage Area Network (SAN) infrastructures. It provides industry-leading

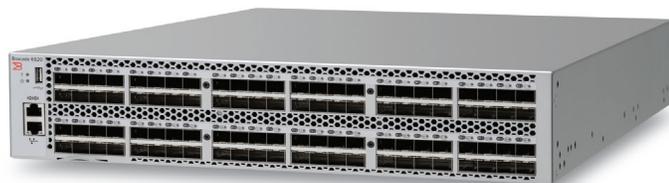

BROCADE

Brocade Fabric Vision Technology

Brocade Fabric Vision technology, an extension of Gen 5 Fibre Channel, delivers breakthrough technologies that dramatically simplify SAN deployment and management, drive down costs, and offer unprecedented visibility and insight across the storage network. Key advantages include:

Dramatically reduced costs:

- Automates the deployment of threshold-based rules and policies for proactive monitoring and management, reducing operational costs
- Pre-tests and validates the SAN infrastructure to accelerate deployments and simplify ongoing support
- Eliminates the need for expensive third-party monitoring, diagnostics, and test equipment through built-in flow monitoring, flow mirroring, and traffic generator tools

Maximum infrastructure uptime:

- Provides a customizable dashboard that displays the overall health of the SAN, helping to pinpoint problems faster and enabling trend analysis
- Features critical diagnostic and monitoring capabilities, helping to ensure early problem detection and recovery
- Validates the health, reliability, and performance of the network prior to deployment and for ongoing support, reducing downtime risk

Optimized application performance:

- Provides comprehensive visibility into flows in the fabric, including the ability to automatically learn (discover) flows and non-disruptively monitor flow performance
- Instantly identifies congestion or abnormal levels of latency in the fabric, and identifies exactly which devices and hosts are impacted by the bottleneck
- Provides a customizable performance dashboard with all critical information in one screen to easily identify hot spots and potential network congestion

scalability, reliability, and 16 Gbps performance in a flexible, easy-to-deploy enterprise-class switch, enabling greater data center consolidation, operational efficiency, and business continuity. In addition to increased throughput, it helps improve bandwidth utilization, security, and network visibility and management through in-flight data compression and encryption and advanced diagnostics. It's an ideal switch for bandwidth-intensive workloads, evolving virtualized data centers, and private cloud architectures.

EXCEPTIONAL SCALABILITY FOR DEMANDING WORKLOADS AND DATA CENTER CONSOLIDATION

The Brocade 6520 features 96 Fibre Channel ports in a 2U form factor, delivering industry-leading port density and space utilization for data center consolidation. Designed for maximum flexibility, this enterprise-class switch offers “pay-as-you-grow” scalability with Ports on Demand (PoD). Organizations can quickly, easily, and cost-effectively scale from 48 to 96 ports in 24-port increments, each supporting 2, 4, 8, 10, or 16 Gbps. In addition, flexible, high-speed 16 Gbps and 8 Gbps optics allow organizations to deploy bandwidth on demand to meet growing data center needs. For maximum flexibility, the switch also features dual-direction airflow options to support the latest hot aisle/cold aisle configurations.

INDUSTRY-LEADING PERFORMANCE FOR GROWING WORKLOADS

The Brocade 6520 delivers exceptional performance for growing and dynamic workloads through a combination of market-leading throughput and bandwidth utilization. With the unpredictability of virtualized workloads and cloud services, throughput becomes critical to ensuring that the network does not become the bottleneck. With 96 ports, the Brocade 6520 provides an aggregate 1536 Gbps full-duplex throughput. Up to eight ISLs can be combined together in a 128 Gbps framed-based trunk. In addition, exchange-based Dynamic Path

Selection (DPS) optimizes fabric-wide performance and load balancing by automatically routing data to the most efficient, available path in the fabric (see Figure 1). This augments Brocade ISL Trunking to provide more effective load balancing in certain configurations. Moreover, the enterprise-class capabilities of this switch yield 40 percent higher performance compared to 10 Gigabit Ethernet (GbE) alternatives at a similar cost.


SIMPLIFIED MANAGEMENT AND ROBUST NETWORK ANALYTICS

Brocade Fabric Vision technology, an extension of Brocade Gen 5 Fibre Channel, introduces a breakthrough hardware and software solution that maximizes uptime, simplifies SAN management, and provides unprecedented visibility and insight across the storage network. Offering innovative diagnostic, monitoring, and management capabilities, the Brocade 6520 with Fabric Vision technology helps administrators avoid problems, maximize application performance, and reduce operational costs. Brocade Fabric Vision technology includes:

- **Flow Vision:** Enables administrators to identify, monitor, and analyze specific application and data flows in order to maximize performance, avoid congestion, and optimize resources. Flow Vision includes:
 - **Flow Monitor:** Provides comprehensive visibility into flows in the fabric, including the ability to automatically learn (discover) flows and non-disruptively monitor flow performance. Organizations can monitor all flows from a specific host to multiple targets/LUNs, from multiple hosts to a specific target/LUN, or across a specific ISL. They also can perform LUN-level monitoring of specific frame types to identify resource contention or congestion that is impacting application performance.

- **Flow Mirror:** Provides the ability to non-disruptively create copies of specific application and data flows or frame types that can be captured for deeper analysis.
- **Flow Generator:** Provides a built-in test traffic generator for pre-testing and validating the SAN infrastructure—including verification of routes and integrity of optics, cables, ports, and ISLs—for robustness before deploying applications.
- **Monitoring and Alerting Policy Suite (MAPS):** Simplifies fabric-wide threshold configuration and monitoring. MAPS allows organizations to leverage pre-built rule/policy-based templates. The result is a simple, two-step process for applying thresholds and alerts to ports and switches. Organizations can configure the entire fabric (or multiple fabrics) at one time using common rules and policies, or customize policies for specific ports or switch elements—all through a single dialog. The integrated dashboard displays an overall switch health report, along with details on out-of-policy conditions, to help administrators quickly pinpoint potential issues and easily identify trends and other behaviors occurring on a switch or fabric.
- **Brocade ClearLink Diagnostics:** Ensures optical and signal integrity for Gen 5 Fibre Channel optics and cables, simplifying deployment and support of high-performance fabrics. It leverages ClearLink Diagnostic Port (D_Port) capabilities of Gen 5 Fibre Channel platforms.
- **Bottleneck Detection:** Identifies and alerts administrators to device or ISL congestion as well as abnormal levels of latency in the fabric. This feature works in conjunction with Brocade Network Advisor to automatically monitor and detect network congestion and latency in the fabric, providing visualization of bottlenecks in a connectivity map and product tree, and identifying exactly which devices and hosts are impacted by a bottlenecked port.
- **Integration into Brocade Network Advisor:** Provides customizable health and performance dashboard views to pinpoint problems faster, simplify SAN configuration and management, and reduce operational costs.

Figure 1. Dynamic Path Selection (DPS) augments Brocade ISL Trunking to route data efficiently between multiple trunk groups.

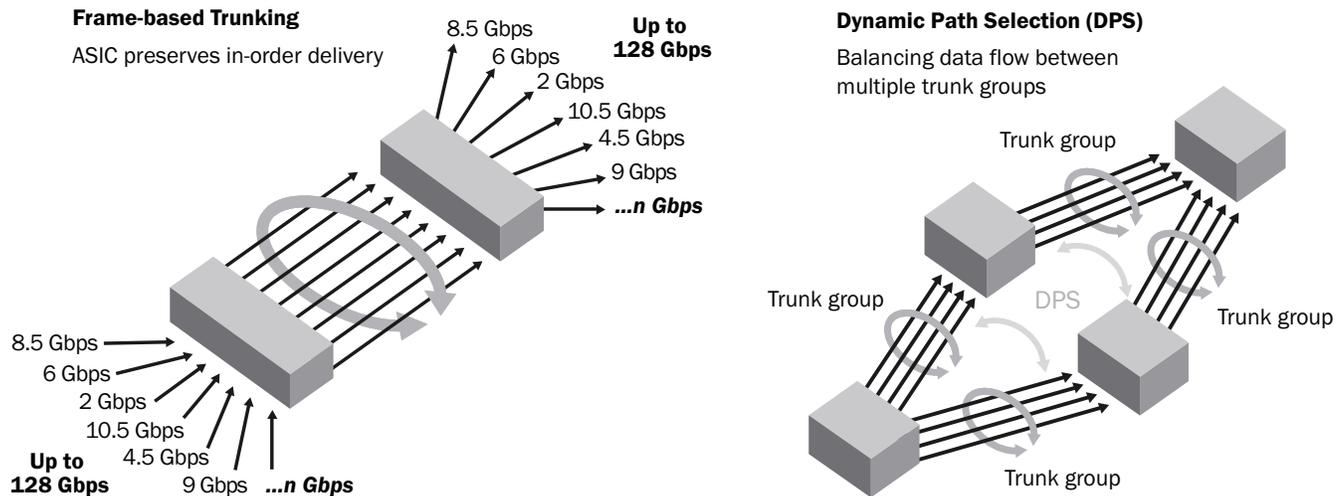

- **Critical diagnostic and monitoring capabilities:** Help ensure early problem detection and recovery.
- **Non-intrusive and non-disruptive monitoring on every port:** Provides an end-to-end view of the entire fabric using capabilities integrated into the hardware. This allows sophisticated monitoring without imposing an additional burden on switches with frequent polling activity.
- **Forward Error Correction (FEC):** Enables recovery from bit errors in ISLs, enhancing transmission reliability and performance.
- **Credit Loss Recovery:** Helps overcome performance degradation and congestion due to buffer credit loss.
- **Real-time bandwidth consumption by hosts/applications on ISLs:** Helps easily identify hot spots and potential network congestion.

A BUILDING BLOCK FOR VIRTUALIZED, PRIVATE CLOUD STORAGE

The Brocade 6520 provides a critical building block for today's highly virtualized, private cloud storage environments. It simplifies server virtualization and Virtual Desktop Infrastructure (VDI) management while meeting the high-throughput demands of Solid State Disks (SSDs). The Brocade 6520 also supports multitenancy in cloud environments through Virtual Fabrics, Quality of Service (QoS), and fabric-based zoning features.

The Brocade 6520 enables secure metro extension to virtual private or hybrid clouds with 10 Gbps Dense Wavelength Division Multiplexing (DWDM) link support, as well as in-flight encryption and data compression to optimize bandwidth and minimize the risk of unauthorized access. With four times more in-flight encryption and compression ports than the Brocade 6510 Switch, the Brocade 6520 supports higher data volumes over long distance. The switch also features on-board data security and acceleration, minimizing the need for separate acceleration appliances

to support distance extension. Internal fault-tolerant and enterprise-class RAS features help minimize downtime to support mission-critical cloud environments.

BROCADE GLOBAL SERVICES

Brocade Global Services has the expertise to help organizations build scalable, efficient cloud infrastructures. Leveraging 15 years of expertise in storage, networking, and virtualization, Brocade Global Services delivers world-class professional services, technical support, network monitoring services, and education, enabling organizations to maximize their Brocade investments, accelerate new technology deployments, and optimize the performance of networking infrastructures.

MAXIMIZING INVESTMENTS

To help optimize technology investments, Brocade and its partners offer complete solutions that include professional services, technical support, and education. For more information, contact a Brocade sales partner or visit www.brocade.com.

BROCADE 6520 SPECIFICATIONS

System Architecture	
Fibre Channel ports	Switch mode (default): 48-, 72-, and 96-port configurations (24-port increments through Ports on Demand [PoD] licenses); E, F, M, D, EX ports
Scalability	Full fabric architecture with a maximum of 239 switches
Certified maximum	6000 active nodes; 56 switches, 19 hops in Brocade Fabric OS® fabrics; larger fabrics certified as required
Performance	Fibre Channel: 2.125 Gbps line speed, full duplex; 4.25 Gbps line speed, full duplex; 8.5 Gbps line speed, full duplex; 10.53 Gbps line speed, full duplex; 14.025 Gbps line speed, full duplex; auto-sensing of 2, 4, 8, and 16 Gbps port speeds; 10 Gbps optionally programmable to fixed port speed
ISL trunking	Frame-based Trunking with up to eight 16 Gbps ports per ISL trunk; up to 128 Gbps per ISL trunk. Exchange-based load balancing across ISLs with DPS included in Brocade Fabric OS.
Aggregate bandwidth	1536 Gbps: 96 ports × 16 Gbps data rate
Fabric latency	Latency for locally switched ports is 700 ns; latency between port groups is 2.1 µsec, cut-through routing at 16 Gbps between locally switched groups. Encryption/compression is 5.5 µsec per node; Forward Error Correction (FEC) adds 400 ns between E_Ports (enabled by default).
Maximum frame size	2112 byte payload
Frame buffers	8192 dynamically allocated
Classes of service	Class 2, Class 3, Class F (inter-switch frames)
Port types	D_Port (ClearLink Diagnostic Port), E_Port, EX_Port, F_Port, M_Port (Mirror Port); optional port type control
Data traffic types	Fabric switches supporting unicast
Media types	16 Gbps: Brocade 6520 requires Brocade hot-pluggable SFP+, LC connector; 16 Gbps SWL, LWL, ELWL 10 Gbps: Brocade 6520 requires Brocade hot-pluggable SFP+, LC connector; 10 Gbps SWL, LWL 8 Gbps: Brocade 6520 requires Brocade hot-pluggable SFP+, LC connector; 8 Gbps SWL, LWL, ELWL Fibre Channel distance subject to fiber-optic cable and port speed
USB	One USB port for system log file downloads or firmware upgrades
Fabric services	Monitoring and Alerting Policy Suite (MAPS); Flow Vision; Brocade Advanced Performance Monitoring (APM) (including Top Talkers for E_Ports, F_Ports, and Fabric mode); Brocade Adaptive Networking (Ingress Rate Limiting, Traffic Isolation, QoS); Bottleneck Detection; Brocade Advanced Zoning (default zoning, port/WWN zoning, broadcast zoning); Dynamic Fabric Provisioning (DFP); Dynamic Path Selection (DPS); Brocade Extended Fabrics; Enhanced BB credit recovery; Enhanced Group Management (EGM); Brocade Fabric Watch; FDMI; Frame Redirection; Frame-based Trunking; FSPF; Integrated Routing; IPoFC; Brocade ISL Trunking; Management Server; NPIV; NTP v3; Port Fencing; Registered State Change Notification (RSCN); Reliable Commit Service (RCS); Server Application Optimization (SAO); Simple Name Server (SNS); Virtual Fabrics (Logical Switch, Logical Fabric)
Extension	Fibre Channel, in-flight compression (Brocade LZO) and encryption (AES-GCM-256); integrated optional 10 Gbps Fibre Channel for DWDM MAN connectivity

BROCADE 6520 SPECIFICATIONS (CONTINUED)

Management	
Supported management software	HTTP, SNMP v1/v3 (FE MIB, FC Management MIB), SSH v2; Auditing, Syslog; Brocade Advanced Web Tools, APM, Brocade Fabric Watch; Brocade Network Advisor SAN Enterprise or Brocade Network Advisor SAN Professional/Professional Plus; Command Line Interface (CLI); SMI-S compliant; Administrative Domains; trial licenses for add-on capabilities
Security	AES-GCM-256 encryption on ISLs; DH-CHAP (between switches and end devices), FCAP switch authentication; FIPS 140-2 L2-compliant, HTTPS, IPsec, IP filtering, LDAP with IPv6, OpenLDAP, Port Binding, RADIUS, TACACS+, User-defined Role-Based Access Control (RBAC), Secure Copy (SCP), Secure RPC, SFTP, SSH v2, SSL, Switch Binding, Trusted Switch
Management access	10/100/1000 Mbps Ethernet (RJ-45), in-band over Fibre Channel, serial port (RJ-45), and one USB port
Diagnostics	ClearLink optics and cable diagnostics, including electrical/optical loopback, link traffic/latency/distance; flow mirroring; built-in flow generator; POST and embedded online/offline diagnostics, including environmental monitoring, FCping and Pathinfo (FC traceroute), frame viewer, non-disruptive daemon restart, port mirroring, optics health monitoring, power monitoring, RAStrace logging, and Rolling Reboot Detection (RRD)
Mechanical	
Enclosure	Front-to-back airflow; power from back, 2U Back-to-front airflow; power from back, 2U
Size	Width: 429.25 mm (16.90 in.) Height: 86.74 mm (3.42 in.) Depth: 609.75 mm (24.01 in.)
System weight	16.92 kg (37.3 lb) with two power supply FRUs, without transceivers

Environment	
Operating environment	Temperature: 0°C to 40°C/32°F to 104°F Humidity: 10% to 85% (non-condensing)
Non-operating environment	Temperature: -25°C to 70°C/-13°F to 158°F Humidity: 10% to 90% (non-condensing)
Operating altitude	Up to 3000 m (9842 ft)
Storage altitude	Up to 12 km (39,370 ft)
Shock	Operating: Up to 20 G, 6 ms half-sine Non-operating: Half sine, 33 G 11 ms, 3/eg axis
Vibration	Operating: 0.5 g sine, 0.4 grms random, 5 Hz to 500 Hz Non-operating: 2.0 g sine, 1.1 grms random, 5 Hz to 500 Hz
Heat dissipation	96 ports at 1582 BTU/hr
Airflow	Three hot-swappable, redundant fans; reversible airflow options (front-to-back and back-to-front); maximum 109 CFM (cu. ft./min); nominal 33 CFM
Power	
Power supply	Dual, hot-swappable redundant power supplies with integrated system cooling fans
AC input	85 V to 264 V ~5 A to 2.5 A
Input line frequency	47 Hz to 63 Hz
Power consumption	464 W with all 96 ports populated with 16 Gbps SWL optics 183 W for empty chassis with no optics

For information about supported SAN standards, visit www.brocade.com/sanstandards.

For information about switch and device interoperability, visit www.brocade.com/interoperability.

For information about hardware regulatory compliance, visit www.brocade.com/regulatorycompliance.

Corporate Headquarters

San Jose, CA USA
T: +1-408-333-8000
info@brocade.com

European Headquarters

Geneva, Switzerland
T: +41-22-799-56-40
emea-info@brocade.com

Asia Pacific Headquarters

Singapore
T: +65-6538-4700
apac-info@brocade.com

© 2013 Brocade Communications Systems, Inc. All Rights Reserved. 07/13 GA-DS-1722-02

ADX, AnyIO, Brocade, Brocade Assurance, the B-wing symbol, DCX, Fabric OS, ICX, MLX, MyBrocade, OpenScript, VCS, VDX, and Vyatta are registered trademarks, and HyperEdge, The Effortless Network, and The On-Demand Data Center are trademarks of Brocade Communications Systems, Inc., in the United States and/or in other countries. Other brands, products, or service names mentioned may be trademarks of their respective owners.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.